

Create API credentials


API Credentials issues OAuth client-credential pairs for machine-to-machine access — your own automation reading the audit trail, or exporting policy.

1. **Create credential**, name it for the thing that will use it.
2. Choose **scopes** — read-only ones like `audit:read` where possible.
3. Optionally restrict it to an **IP allowlist** and set an expiry.
4. The **secret is shown exactly once**. Store it in your secret manager before closing the dialog.

Rotating and revoking

- **Reissue secret** generates a new secret; the old one stops working immediately.
- **Revoke** disables the credential for good. It can't be undone — create a new one.

Both actions ask for confirmation, and name the credential in the prompt, because both break whatever is currently using it.

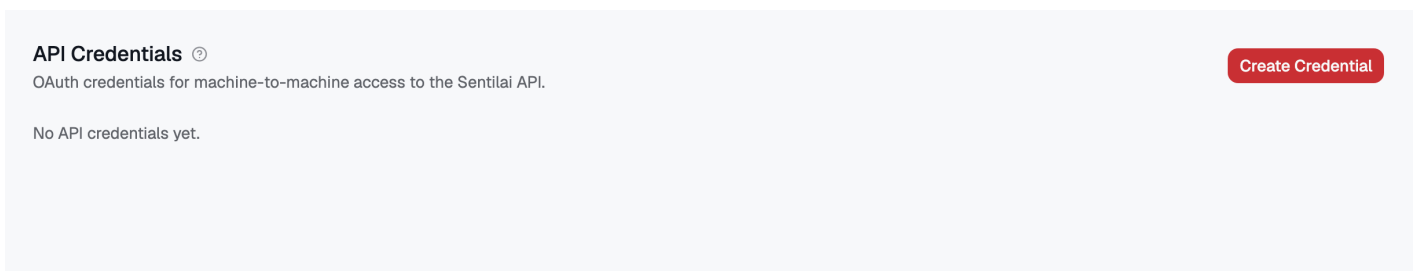

API Credentials — create a scoped, expiring credential. The secret is shown exactly once.

Revision #16

Created 2026-08-01 13:06:48 UTC by Sentilai Docs

Updated 2026-08-14 12:37:49 UTC by Sentilai Docs